


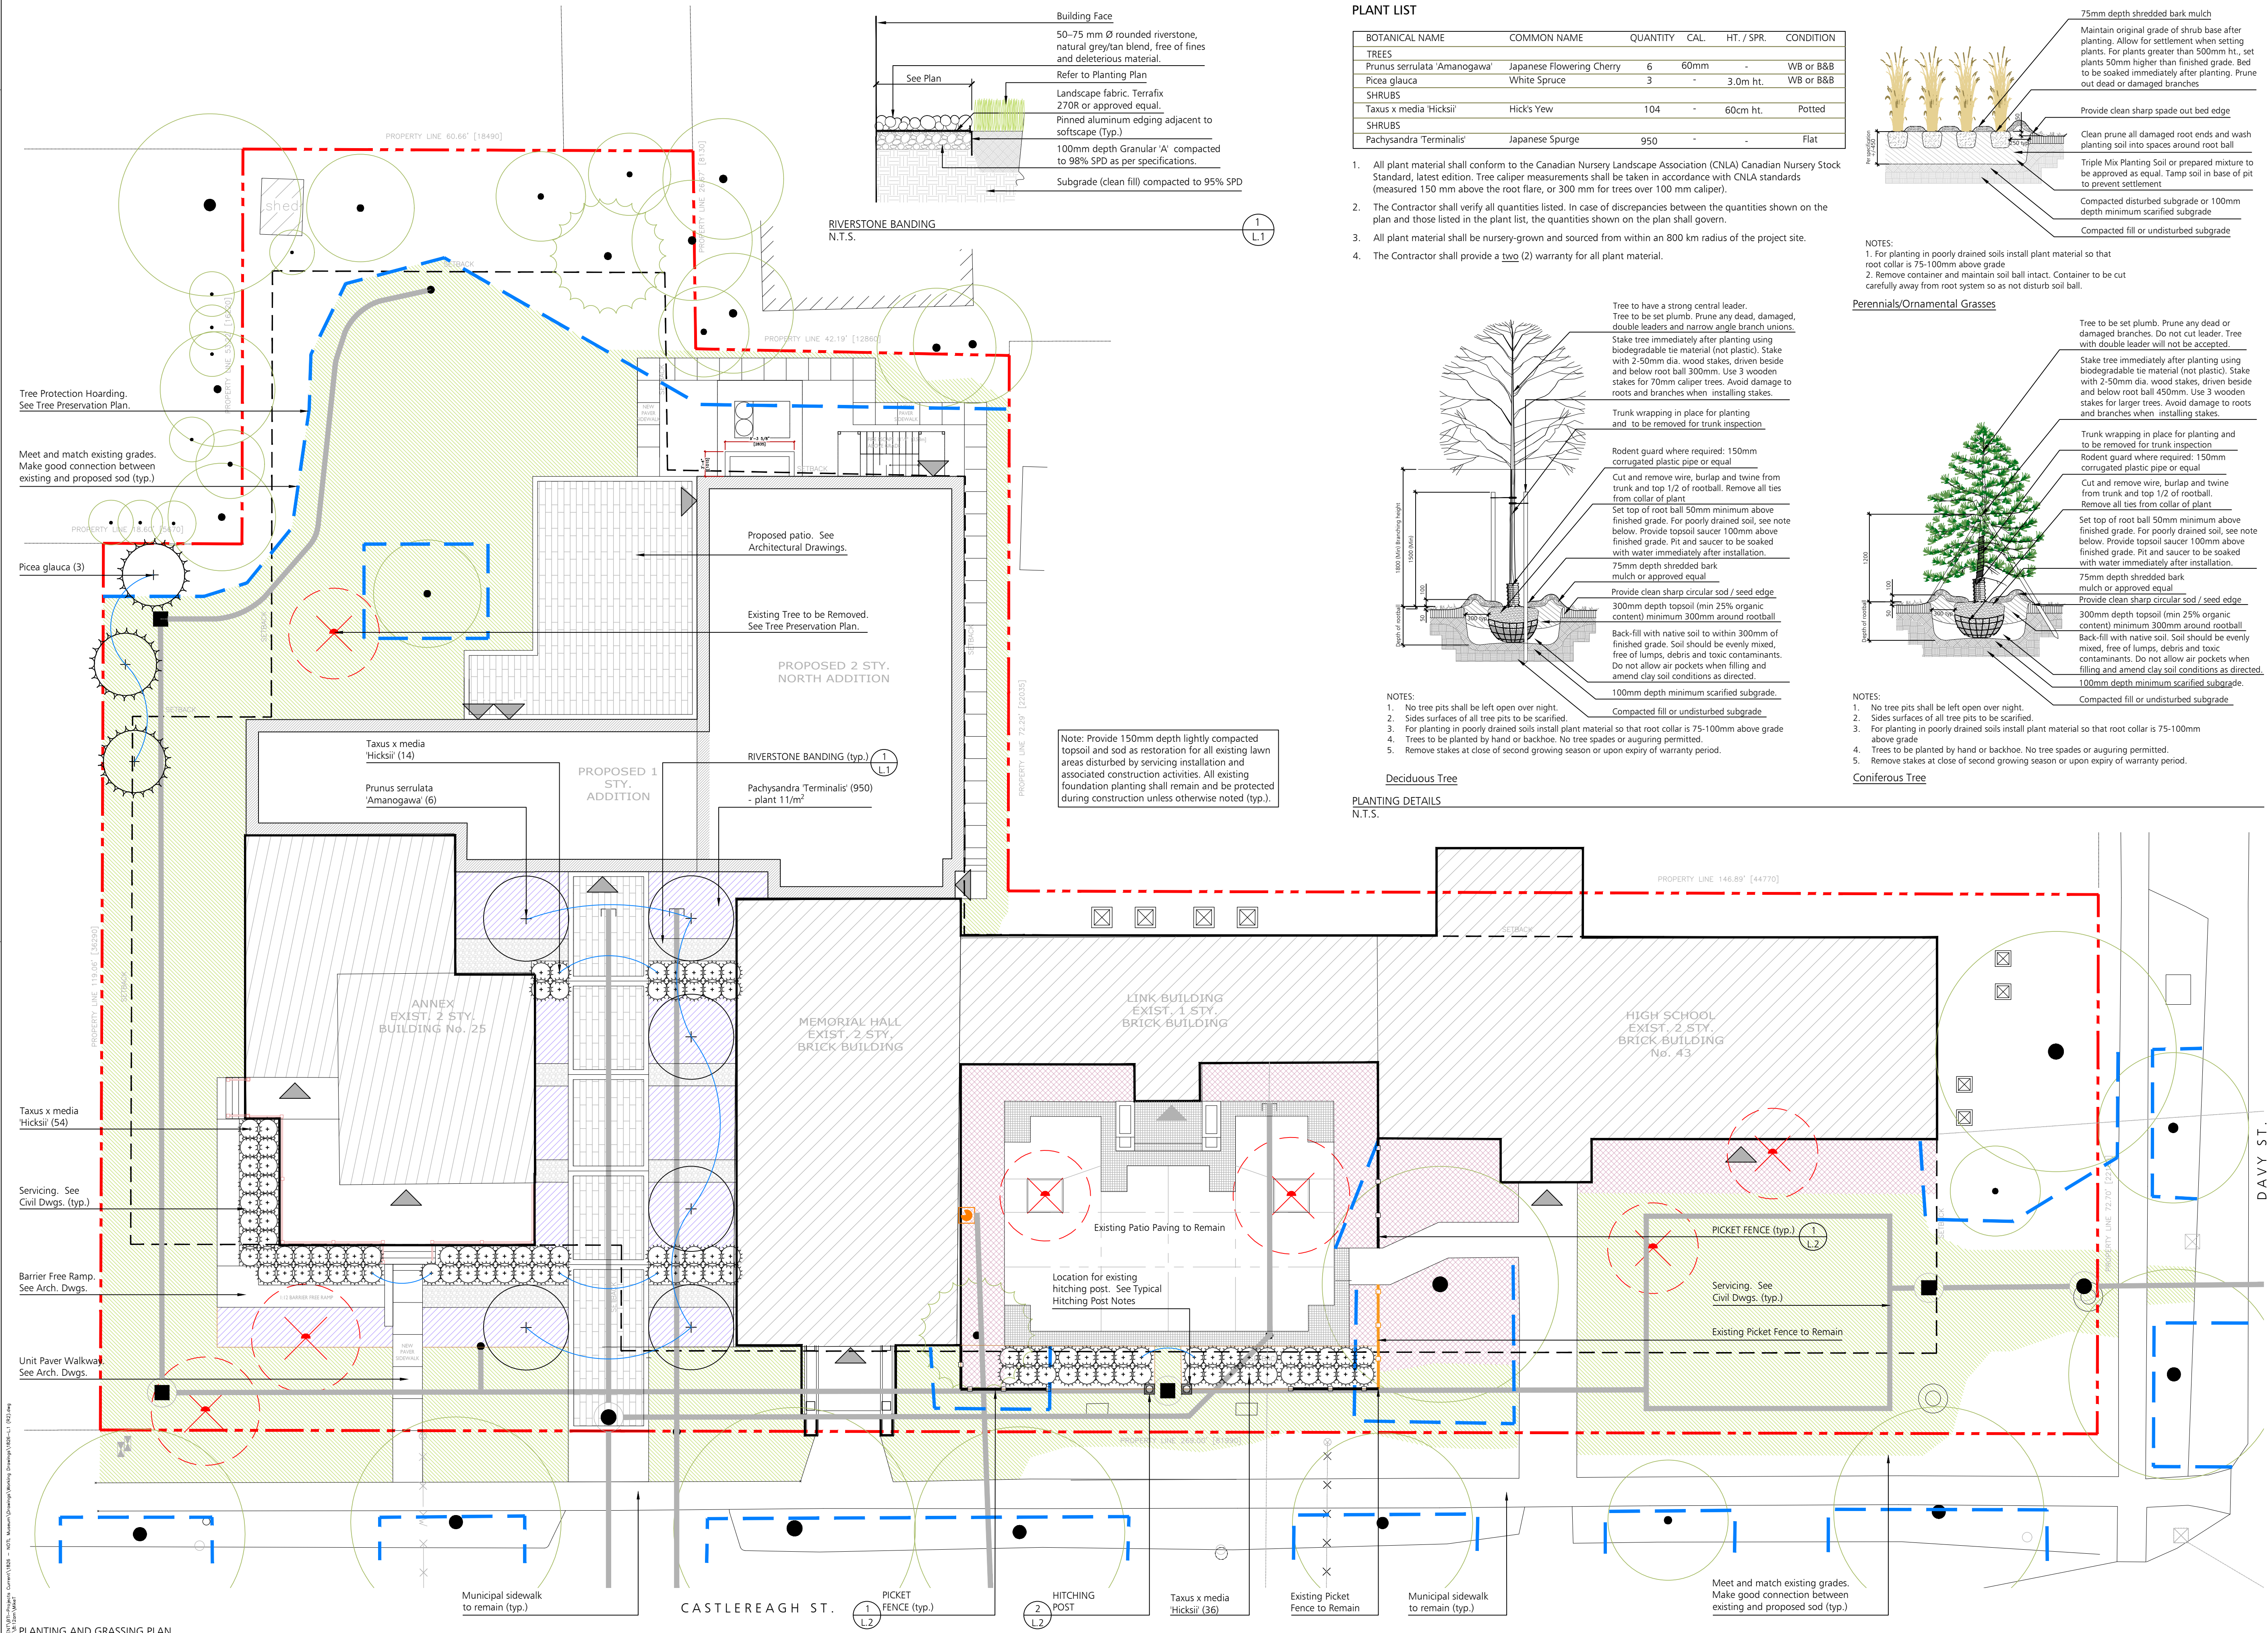


PLANTING AND GRASSING PLAN
1:125

PLANT LIST


BOTANICAL NAME	COMMON NAME	QUANTITY	CAL.	HT. / SPR.	CONDITION
TREES					
Prunus serrulata 'Amanogawa'	Japanese Flowering Cherry	6	60mm	-	WB or B&B
Picea glauca	White Spruce	3	-	3.0m ht.	WB or B&B
SHRUBS					
Taxus x media 'Hicksii'	Hick's Yew	104	-	60cm ht.	Potted
SHRUBS					
Pachysandra 'Terminalis'	Japanese Spurge	950	-	-	Flat

- All plant material shall conform to the Canadian Nursery Landscape Association (CNLA) Canadian Nursery Stock Standard, latest edition. Tree caliper measurements shall be taken in accordance with CNLA standards (measured 150 mm above the root flare, or 300 mm for trees over 100 mm caliper).
- The Contractor shall verify all quantities listed. In case of discrepancies between the quantities shown on the plan and those listed in the plant list, the quantities shown on the plan shall govern.
- All plant material shall be nursery-grown and sourced from within an 800 km radius of the project site.
- The Contractor shall provide a two (2) warranty for all plant material.

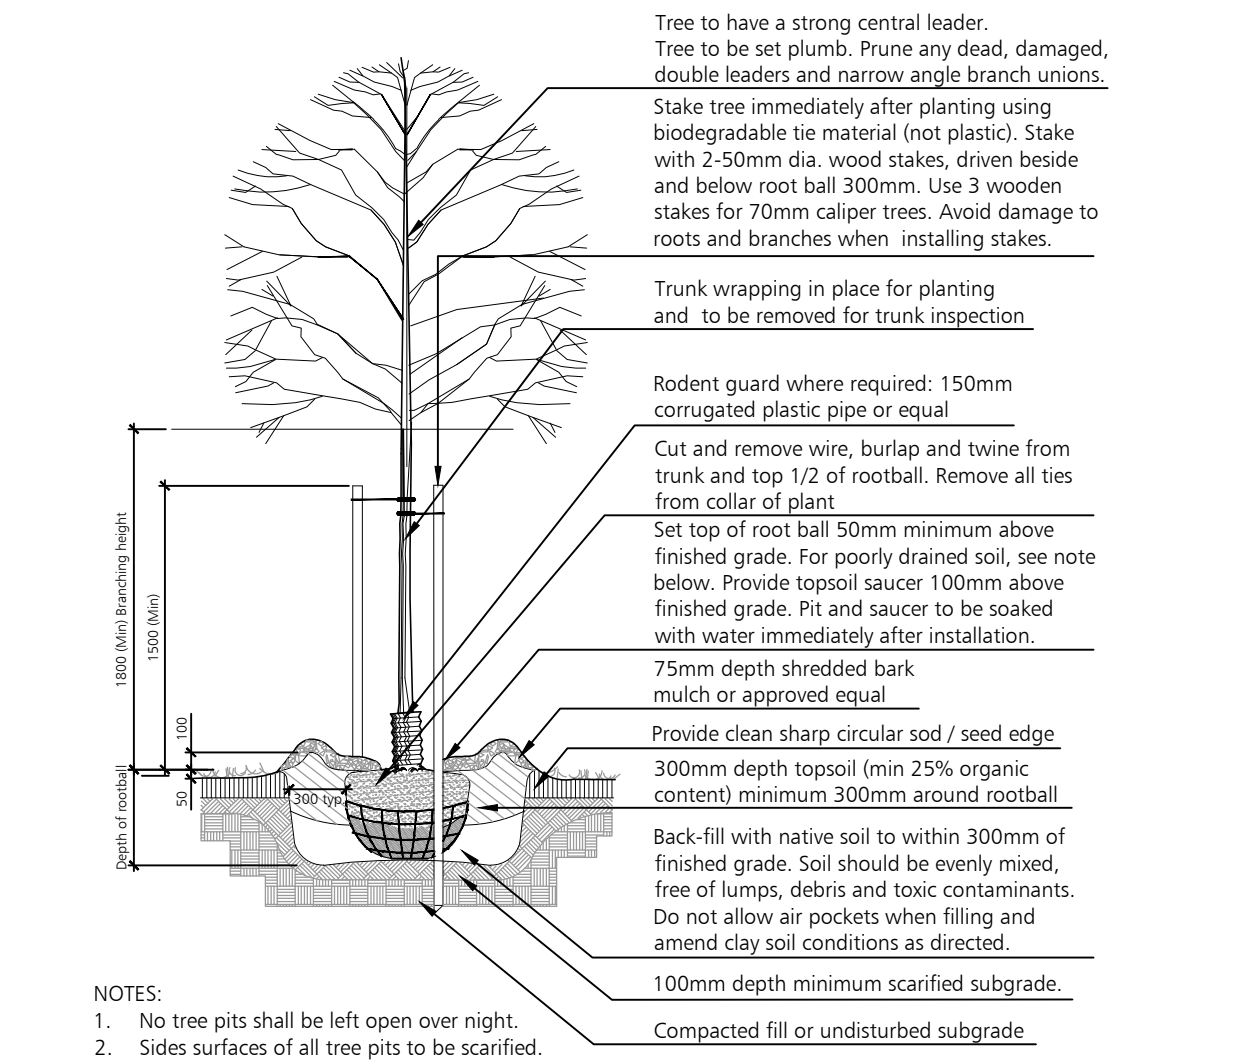


- NOTES:
- No tree pits shall be left open over night.
 - Sides surfaces of all tree pits to be scarified.
 - For planting in poorly drained soils install plant material so that root collar is 75-100mm above grade.
 - Trees to be planted by hand or backhoe. No tree spades or auguring permitted.
 - Remove stakes at close of second growing season or upon expiry of warranty period.

Deciduous Tree
PLANTING DETAILS
N.T.S.

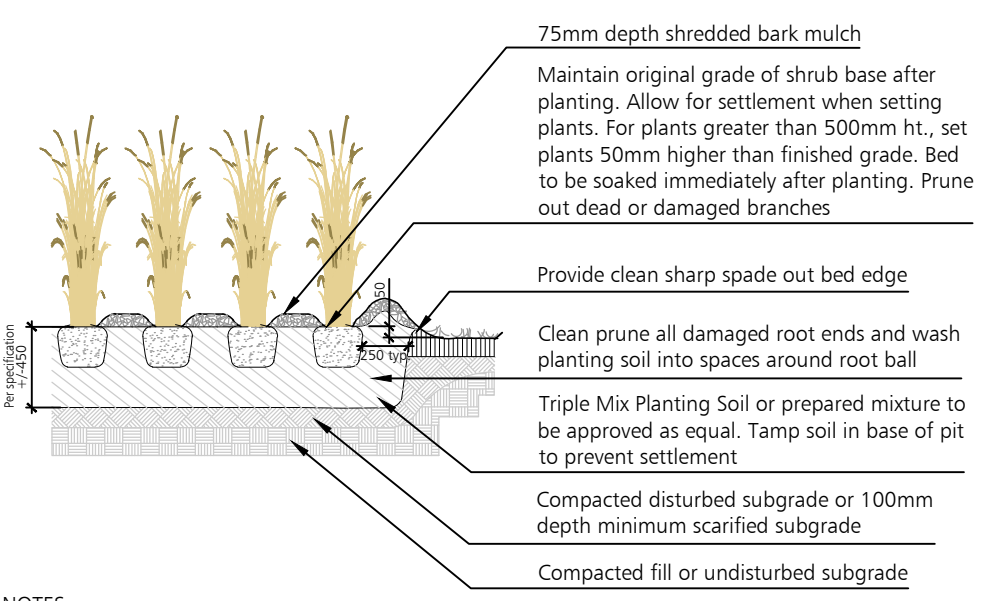

- NOTES:
- For planting in poorly drained soils install plant material so that root collar is 75-100mm above grade.
 - Remove container and maintain soil ball intact. Container to be cut carefully away from root system so as not disturb soil ball.

Perennials/Ornamental Grasses

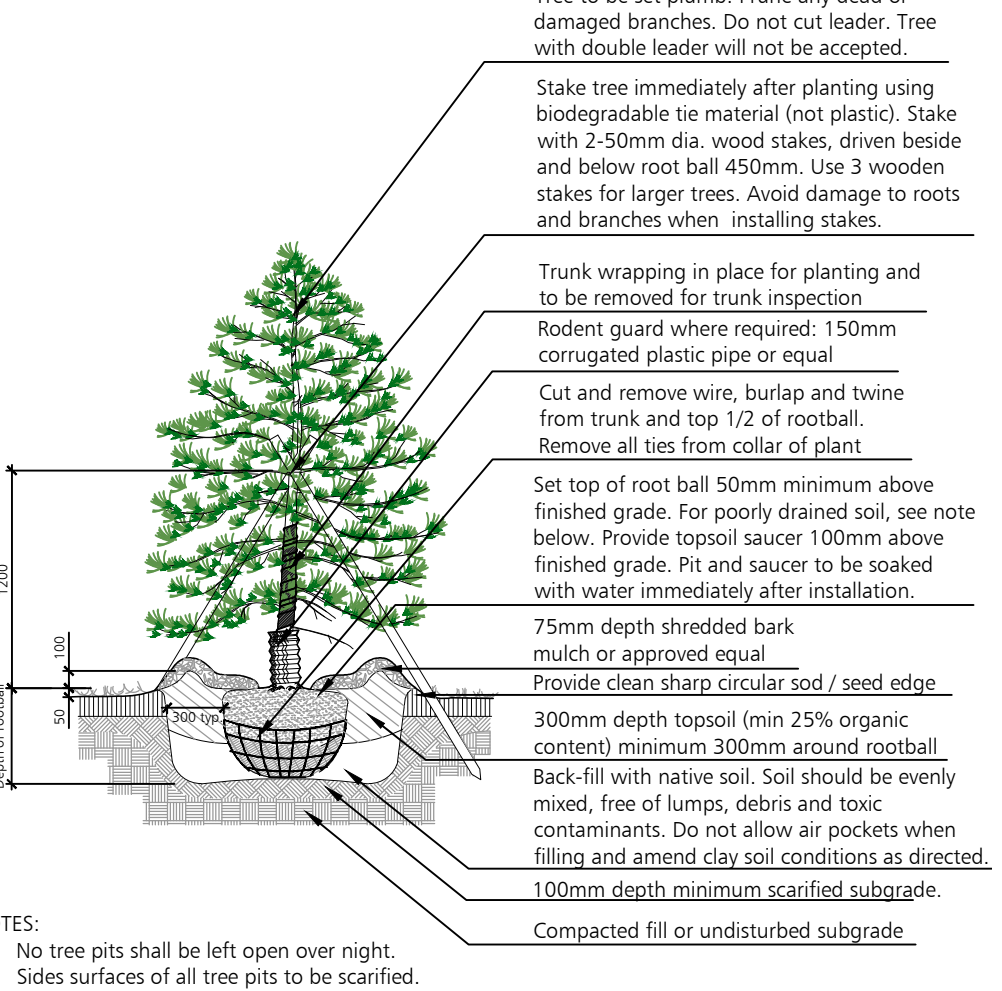

- NOTES:
- No tree pits shall be left open over night.
 - Sides surfaces of all tree pits to be scarified.
 - For planting in poorly drained soils install plant material so that root collar is 75-100mm above grade.
 - Trees to be planted by hand or backhoe. No tree spades or auguring permitted.
 - Remove stakes at close of second growing season or upon expiry of warranty period.

Coniferous Tree

LEGEND

- Property Line
- Building Setback
- Tree Protection Hoarding. Refer to Tree Preservation Plan
- Existing Picket Fence to Remain
- Proposed Picket Fence
- Tree to be Removed. Refer to Tree Preservation Plan
- Existing Trees to Remain
- Proposed Deciduous Tree
- Proposed Coniferous Tree
- Proposed Shrubs
- Proposed Perennials
- Proposed Riverstone Banding
- 150mm Depth Lightly Compacted Topsoil, Finegrade and Sod
- Existing Softscape to Remain

OWNER'S NAME

OWNER'S SIGNATURE



Town of Niagara-on-the-Lake

LORD MAYOR

TOWN CLERK

DATE

Note: All Drawings by Baker Turner inc. to be Printed in Colour.

REVISIONS

DATE	DESCRIPTION
Jun 26/26	Issued for Submission
Jun 12/26	Revised per Museum Comments
Jun 9/26	Issued for Internal Review/Discussion

NOTE: Contractor is to check and verify all dimensions and conditions on the project, and is to immediately report any discrepancies to the landscape architect before proceeding with the work.





Landscape Architecture | Site Design

Suite 200, 2nd floor
2010 Winston Park Drive
Oakville Ontario L6H 5R7

tel: (289) 391-7620
web: www.bakerturner.com
email: tba@bakerturner.com

Project Title

Niagara-on-the-Lake Museum
43 Castlereagh Street
Niagara-on-the-Lake, ON

Planting and Grassing Plan, & Details

Date	Issued
June 2026	
Job Number	Drawn By
BTI-1826	MT
Scale	Checked By
As Shown	MT
Sheet Number	File Number
L1	