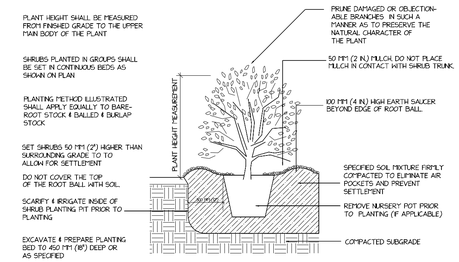

SHRUB PLANTING DETAIL

TYPICAL INSTALLATION

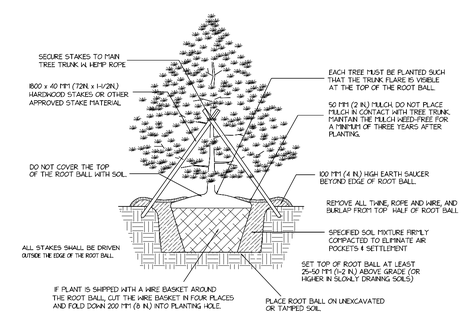

CONIFEROUS TREE PLANTING DETAIL

TYPICAL INSTALLATION - 66" (200CM) OR LESS

PLANT LIST

Qty	Botanical Name	Common Name	Size/Condition
Trees			
18	Fagus sylvatica 'Dawyck Purple'	DAWYCK PURPLE BEECH	45mm W.B.
47	Quercus palustris	PIN OAK	60 mm W.B.
Conifers			
26	Picea pungens 'Baby Blue'	BLUE SPRUCE	250 cm W.B.
36	Taxus x media 'Fairview'	FAIRVIEW YEW	50cm 5gal
Shrubs			
49	Euonymus alatus 'Compactus'	COMPACTUS BURNING BUSH	60CM 2GAL POT
Ornamental Grasses			
48	Calamagrostis x acutiflora 'Karl Foerster'	KARL FOERSTER REED GRASS	2 GAL POT
Groundcovers			
180	Euonymus fortunei 'Moonshadow'	MOONSHADOW EUONYMUS	30cm 2gal

NOTES:
CONTRACTOR TO SUPPLY & INSTALL PLANT MATERIAL PER DESIGN, CONTRACTOR TO VERIFY QUANTITIES ON PLANT LIST TO PLAN.

PLANT MATERIAL TO CONFORM TO CANADIAN NURSERY ASSOCIATION METRIC GUIDE TO SPECIFICATIONS FOR NURSERY STOCK.

CONTRACTOR RESPONSIBLE FOR UTILITY LOCATES.

ALL PLANT MATERIAL TO BE GUARANTEED FOR ONE(1) YEAR.

ALL SHRUB AND PERENNIAL PLANTINGS SHALL BE CONTINUOUS BEDS UNLESS OTHERWISE NOTED.

ALL BEDS TO BE MULCHED WITH SHREDDED PINE OR CEDAR MULCH TO A DEPTH OF 75MM.

ALL REMAINING AREAS TO BE SODDED WITH #1 KENTUCKY BLUE GRASS. AREAS DISTURBED BY CONSTRUCTION TO BE RE-GRADED AND SODDED.

BACKFILL ALL PLANT BEDS WITH SOIL MIXTURE TO A DEPTH OF NO LESS THAN 250MM.
SOIL MIXTURE: 6 PARTS SAND LOAM, TWO PARTS WELL ROTTED MANURE AND ONE PART PEATMOSS.

NOTES

N

ONTARIO ASSOCIATION OF LANDSCAPE ARCHITECTS
DEVELOPER / STUDIOS
OALA
MEMBER

No.	Date	Description
1	29/10/25	ADDITION OF CONDENSER

REVISIONS

PROJECT:

ST. DAVIDS COLD STORAGE (PHASE 2)
365 FOUR MILE CREEK RD.
TOWN OF NIAGARA-ON-THE-LAKE

LANDSCAPE PLAN

LANDSCAPE FLORIDA
679 LINCOLN AVE., NIAGARA-ON-THE-LAKE, ON L0S 1J0
P: 905.645.5250 EMAIL: office@landscapeflorida.ca

SCALE	1 : 400
DRAWN BY	C.S.
CHECKED BY	C.S.
DATE	30/05/22
DATE OF PRINT	30/05/22

PROJECT NO. 22-616

SHEET NO. L1

Powered by BynaSOFT®