


1 SITE PLAN
A-1 SCALE: 1:500

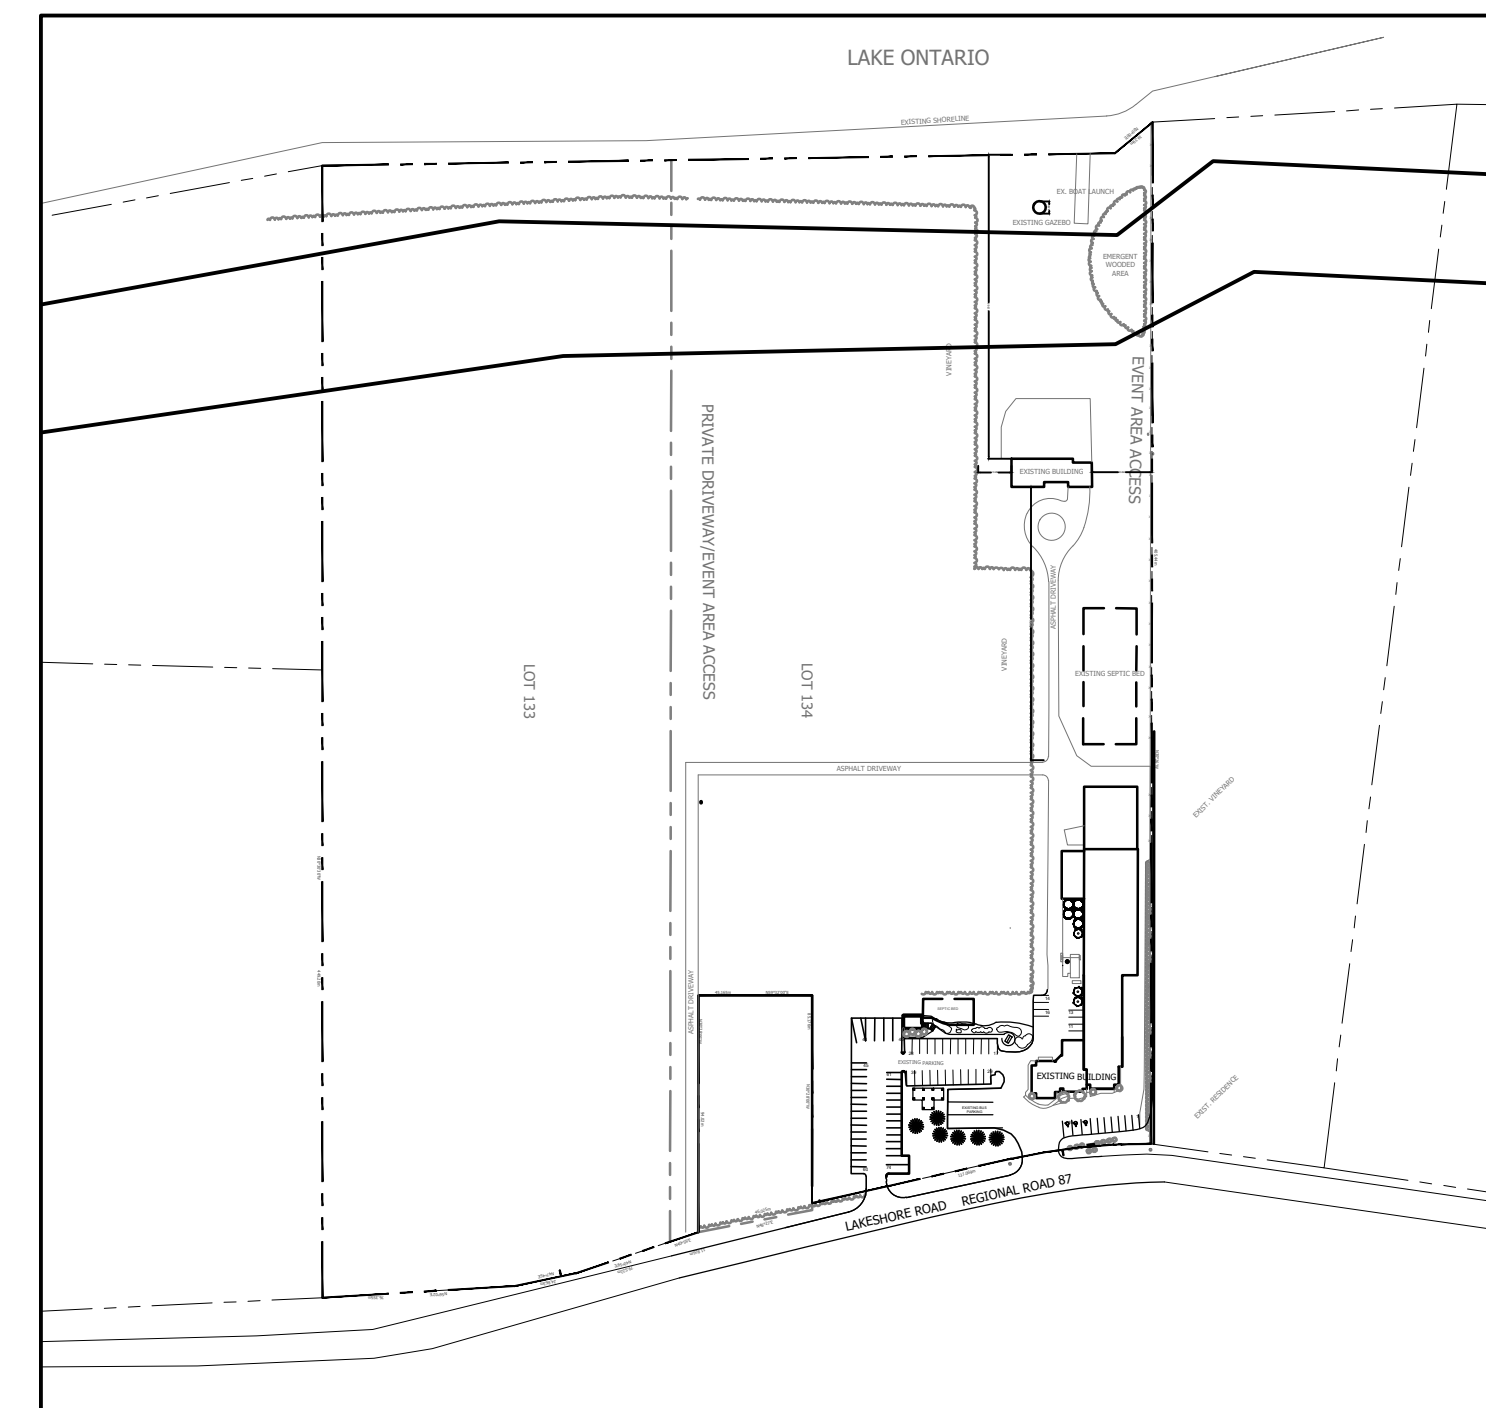


2 KEY PLAN
A-1 SCALE: 1:3000

ON-FARM DIVERSIFIED USE CALCULATION		
	DESCRIPTION	AREA
AGRICULTURAL	EXISTING RESIDENCE	327 SQ.M
	VINEYARD	100,738.2 SQ.M
AGRICULTURE-RELATED USE	SEPTIC BED	2421 SQ.M
	KITCHEN/OFFICES	38 SQ.M
	WINERY FERMENTING AND AGING TANKS	434.5 SQ.M
	CASE STORAGE	465 SQ.M
	BOTTLE SHOP	76.5 SQ.M
ON-FARM DIVERSIFIED USE (OFDU)	PROPOSED GALLERY AREA	1862.4 SQ.M
	EXISTING PARKING AREA (50%)	856.2 SQ.M
	PARKING AREA	1632.2 SQ.M
	LANDSCAPE AREA	2201 SQ.M
	EXISTING GAZEBO (50%)	9.4 SQ.M
	HOSPITALITY ROOM (50%)	45.9 SQ.M
	TOTAL AREA (OFDU)	6607.1 SQ.M (4.3%)
	OVERALL LOT AREA	151,078 SQ.M

PROPERTY DESCRIPTION	
CIVIC ADDRESS	1096 LAKESHORE ROAD, NIAGARA-ON-THE-LAKE, ON, L0S 1J0
LEGAL DESCRIPTION	PLAN M1 PT LOTS 133 AND 134

ZONING MATRIX - BYLAW NO 500A-74		
EXISTING ZONING	RURAL (A), SPECIAL EXEMPTION 500IR-94, 500VO-11	
PROPOSED ZONING	SITE SPECIFIC - RURAL (A)-XX - TO PERMIT USE (OUTDOOR EVENTS)	
	REQUIRED	PROPOSED
MINIMUM LOT FRONTAGE	38.10 M	46.69 M
MINIMUM LOT AREA	4.05 Ha	15 Ha
MINIMUM LOT DEPTH	N/A	253.24 M
MAXIMUM LOT COVERAGE	15%	3230 SQ.M (2.2%) - COMPLIANT
MINIMUM FRONT YARD	15.24 M	108.52 M
MINIMUM INTERIOR SIDE YARD	3.05 M	13.28 M
MINIMUM EXTERIOR SIDE YARD	9.14 M	N/A
MINIMUM REAR SIDE YARD	15.24 M	120.59 M
MINIMUM DWELLING FLOOR AREA	1 STOREY - 92.90 SQ.M	1 STOREY - 326.4 SQ.M
	2 STOREY - 139.35 SQ.M	N/A
MAXIMUM BUILDING HEIGHT	10.67 M	1 STOREY - COMPLIANT
ACCESSORY BUILDING YARDS	N/A	N/A
PARKING REQUIREMENTS	AGRICULTURAL MARKET/COMMERCIAL - 1 per 18.5 m ² GFLA. 1862.4 SQ.M = 100 Parking Stalls	82 Parking Stalls - COMPLIANT 3 Accessible Parking Stalls + 74 Existing Parking stalls = 159 stalls
SECONDARY USES (Special Exemption Bylaw 500IR-94, 500VO-11)	(d) The maximum total floor area for all secondary uses permitted herein shall be 636,892 m ² (6,855.44 ft ²), with the area for hospitality and retail sales not exceeding 202,032 m ² (2,174.65 ft ²) and 295,460 m ² (3,180.31 ft ²), respectively. The agricultural market shall have an allowable floor area of 139.4 m ² (1,500 ft ²)."	Outdoor Event Area - 1862.4 SQ.M - NOT COMPLIANT
SECONDARY USES (Special Exemption Bylaw 500IR-94, 500VO-11)	(a) The retail sale of wine (b) A hospitality room (c) An agricultural market	Outdoor Event Area - NOT COMPLIANT



E	ZBA SUBMISSION	06 JUN 2025	ZK
D	COORDINATION	24 APR 2025	ZK
C	COORDINATION	11 APR 2025	ZK
B	PRE-CONSULTATION	07 MAR 2025	ZK
A	COORDINATION	06 MAR 2025	ZK
	ISSUE	ISSUED FOR	DATE

Do not scale drawings. Report any discrepancies to Quartek Group Inc. before proceeding.
Drawings must be sealed by the Architect and / or Engineer prior to the use for any building permit applications and / or government approval. Seals must be signed by the Architect and / or Engineer before drawings are used for any construction.
All construction to be in accordance with the current Ontario Building Code and all applicable Ontario regulations.
All drawings and related documents remain the property of Quartek Group Inc., all drawings are protected under copyright and under contract.

Quartek
 Architects • Planners
 Engineers • Project Managers
 T: 905.984.8676
 89 - 91 St. Paul Street, Suite 100,
 St. Catharines, ON, L2R 3M3
 www.quartekgroup.com

project title
**Konzelmann Estate Winery
 Outdoor Hospitality**
 1096 Lakeshore Road, Niagara-on-the-Lake

drawing title
CONCEPT PLAN

drawn by
 JR

designed by
 SS/JR

scale
 1:500

date
 06 Jun 2025

job number
 25024

issue
 A

drawing number
 A-1

06 Jun 2025
PRELIMINARY